



Control your work flow, schedule, and budget with the fastest, most consistent material delivery on the market with Beta Max™ high speed hoists

faster. safer. smarter.

KEY FEATURES

- Ideal for precision placement of delicate materials
- Confined and hard to reach spaces made easy with a portable hoist
- Variable Frequency Drive allows for smooth acceleration and deceleration of hoist from 10ft per second up to 80ft per minute
- VFD follows Three Phase motor to operate on Single Phase Power
- Pick and place load without re-rigging
- Optional Scaff-Trac Mounting System provides a standardized and complete lifting solution engineered for easy installation every time
- Flexible I-Beam Mounting Option works with and configures to each unique job-site

SAFETY FEATURES

- Water Tight Connectors
- Easy Cable Replacement (Beta Max™ provides camps and crimp)
- Failsafe brake holds the load securely when not lifting or lowering - loads are powered up and down, no free-falling or slipping
- Non-rotating cable helps keeps loads from spinning
- Upper-limit Switch Assembly stops the hoist instantly when activated
- Sturdy Electrical Controller equipped with thermal overload sensing device

LEO XXL VFD

H 400ft/200ft | Capacity: 1000lbs/2000lbs



INDUSTRIES SERVED

- **Scaffolding • Masonry • Stucco**
- **Glazing • Demolition • Restoration**
- **Construction**



**Contact Beta Max today for local dealer information,
to discuss your project, or get a quote.**
www.BetamaxHoist.com **(800) 644-6478**

* All Beta Max Hoist Systems meet or exceed ANSI & OSHA specifications. This information is intended to be informative only, and does not constitute a representation or warranty with regard to Beta Max Hoists or any products or services provided. Prices and information are subject to change. Some or all of the renderings in these materials may vary from the actual hoists.

Rev. 05-2016

SPECIFICATIONS

Set Up	Single Line	Double Line
Lift Capacity	1,000 lbs	2,000 lbs
Lift Speed	80 fpm	40 fpm
LEO XXL Lift Height	400'	200'
A/C Power	220v - 13 amp	220v - 13 amp
Horsepower	3 Phase : 3.3 HP	
Mounting Options	Scaff-Trac, Trestle Monorail, I-Beam and Fixed I-Beam	


MOUNTING OPTIONS




Scaff-Trac




Trestle Monorail

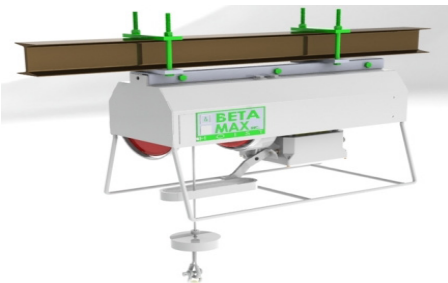

Fixed I-Beam

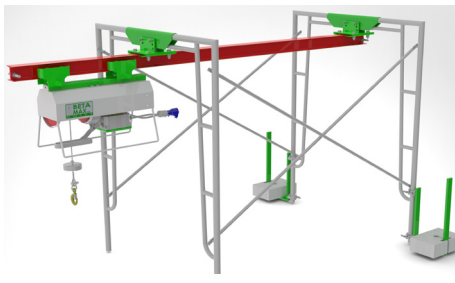

I-Beam Trolley

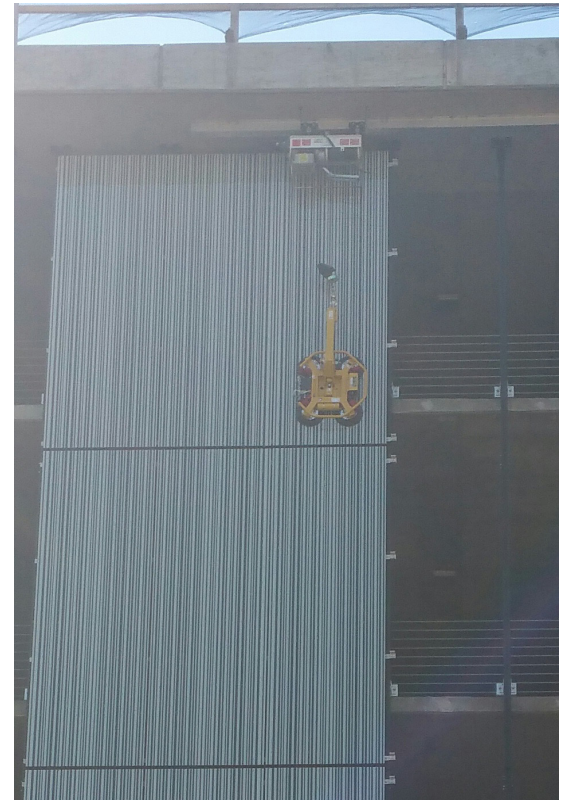

ACCESSORIES

- Brick Fork • Block Fork • Scaffold Frame Fork • Equipment Basket
- Dumpster Bucket • Spreader Bar • Mud Tub • Double Rope Kit
- Counterweight Clamp Assembly • Remote Control Extension
- Power Cord Extension • Wireless Dual Control Package • Booster Transformer

**Contact Beta Max today for local dealer information,
to discuss your project, or get a quote.**

www.BetamaxHoist.com

(800) 644-6478