

faster. safer. smarter.

I-BEAM: FIXED & TROLLEY

Capacity: 2000lbs

KEY FEATURES

FIXED I-BEAM


- Fixed I-Beam option firmly holds the hoist stationary. Perfect for moving materials in confined spaces like the interior of scaffolding or an elevator shaft
- Fixed I-Beam top is compatible with I-Beams with a flange width of 2.66"-4.9"

I-BEAM TROLLEY


- Material delivery made easy with I-Beam Trolley that moves along the full length of the beam
- Customize forward and backward cantilever to your unique job site requirements
- Adjustable Flange Widths of 2.66"-8.7" allows Trolley to attach to standard I-Beams allowing for easy installation on any jobsite
- Perfect for heavy duty projects
- Suspension Brackets allow you to install your own I-Beam to existing scaffolding anywhere on the jobsite
- Counterweight Clamp Assembly helps balance overall weight distribution, installs easily and accommodates your weights
- All Beta Max mounting systems can be tailored to your jobsite specifications

COMPONENT LIST

- Suspension Brackets: **60-40** (fits up to 6.25 in flange width)
- Fixed Top: **60-8**
- Trolley Top: **60-25**
- Counter Weight Clamp Assy. **60-1**
- Scorpio Trolley: **20-44-1** (fits up to 6.5 in flange width)

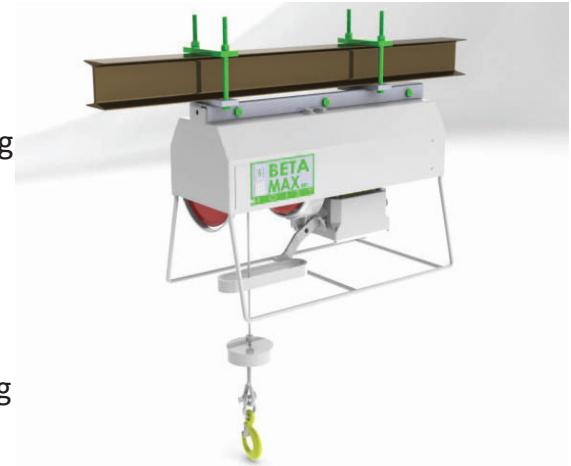

Fixed I-Beam: 60-8

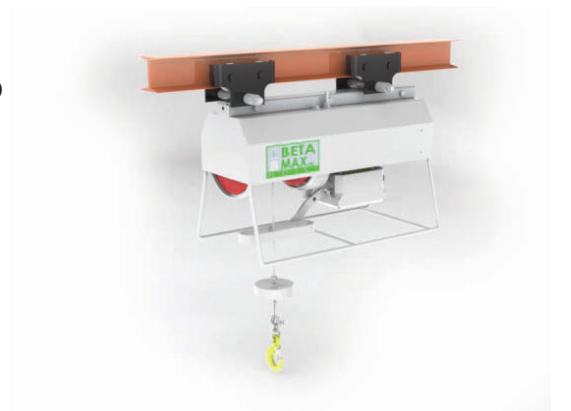



I-Beam Trolley: 20-44-1 | 60-25

COMPATIBLE HOISTS

- **Scorpio Plus XL**
- **Gemini Plus**
- **New Yorker**
- **Leo & Leo XXL**




**Contact Beta Max today for local dealer information,
to discuss your project, or get a quote.**
www.BetamaxHoist.com **(800) 644-6478**

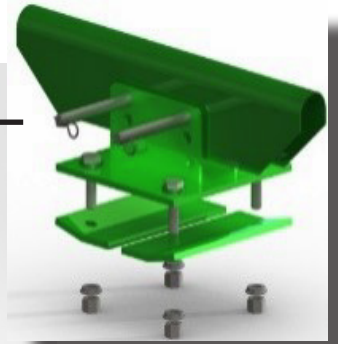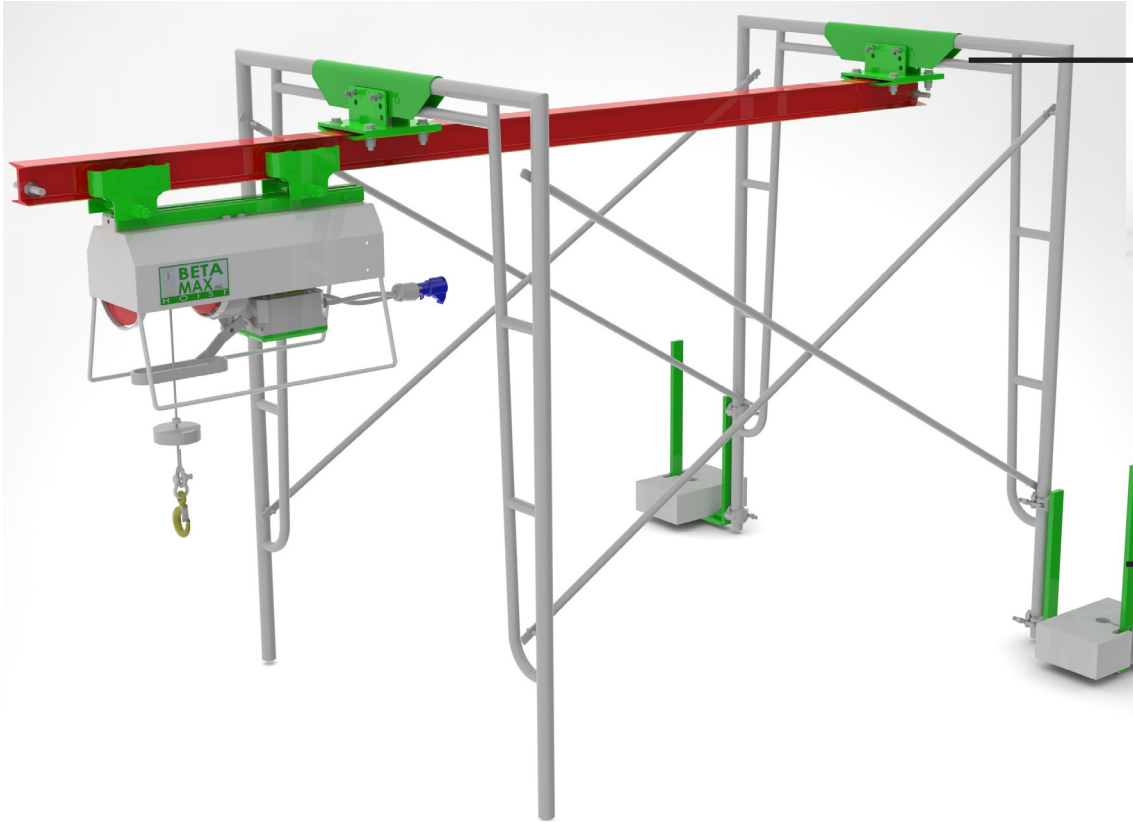


Suspension Bracket


**Counterweight
Clamp Assembly**

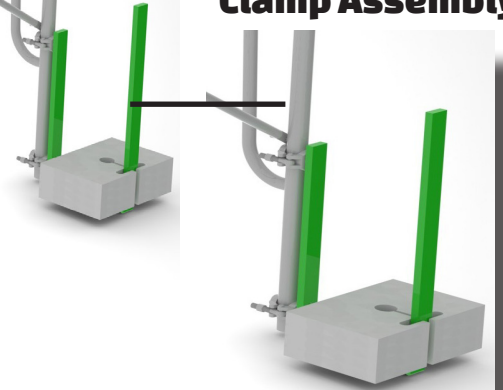

I-Beam Trolley

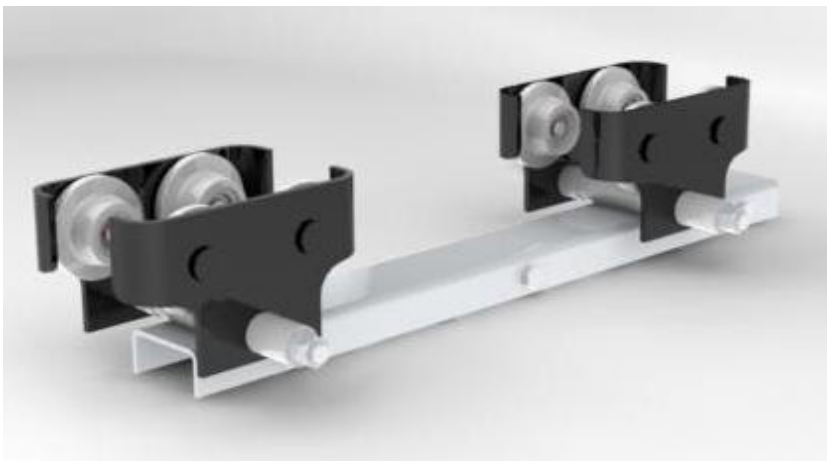

Fixed I-Beam

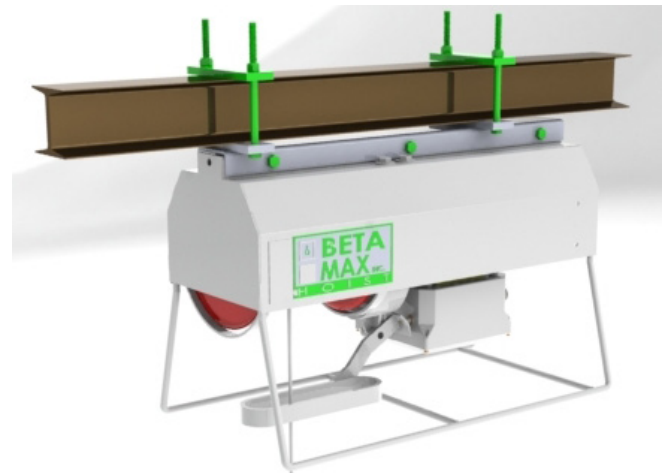

**Contact Beta Max today for local dealer information,
to discuss your project, or get a quote.**

www.BetamaxHoist.com

(800) 644-6478