

# LEO XXL

**Height: 400'/200'**  
**Capacity: 1000/2000lb**

## KEY FEATURES

- Ideal for heavy-duty, high lift projects
- Long lasting performance with minimum maintenance required
- Confined and hard to reach spaces made easy with a portable hoist
- Safe and efficient alternative to rope & pulley systems, cranes, and forklifts
- Installs easily on existing scaffold systems, work platforms, I-Beams, and rooftop mounting options
- Easy Cable Replacement (Beta Max™ provides clamps and crimp)
- I-BEAM TROLLEY TOP Mounting System easily adapts to existing I-Beams onsite



## SAFETY FEATURES

- Water Tight Connectors
- Failsafe brake holds the load securely when not lifting or lowering: loads are powered up and down, no free-falling or slipping
- Non-rotating cable helps keeps loads from spinning
- Upper-limit Switch Assembly stops the hoist instantly when activated
- Sturdy Electrical Controller equipped with thermal overload sensing device

## INDUSTRIES SERVED

- **Scaffolding • Masonry • Stucco**
- **Glazing • Demolition • Restoration • Construction**




**Contact Beta Max today**

**[www.BetamaxHoist.com](http://www.BetamaxHoist.com) (800) 644-6478**

## SPECIFICATIONS

Set Up	Single Line	Double Line
Lift Capacity	1,000 lbs	2,000 lbs
Lift Speed	80 fpm	40 fpm
LEO XXL Lift Height	400'	200'
A/C Power	220v, 3Φ	
Horsepower	3.3 HP	
Mounting Options	Fixed I-Beam, I-Beam Trolley, Scaff-Trac and Trestle Monorail	


## MOUNTING OPTIONS

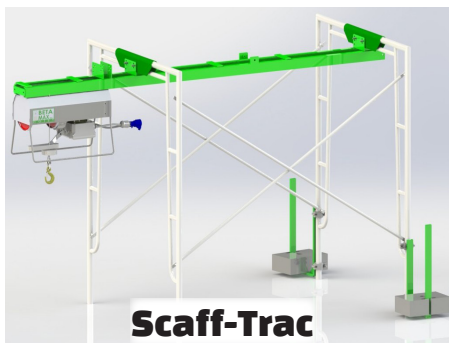


**Scaff-Trac**



**Trestle Monorail**

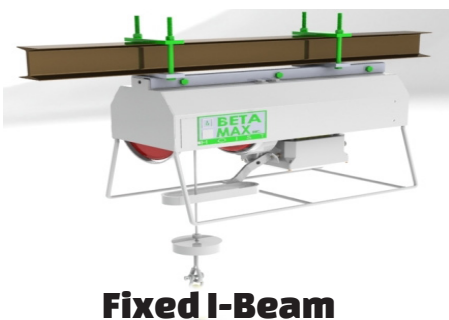

**Fixed I-Beam**

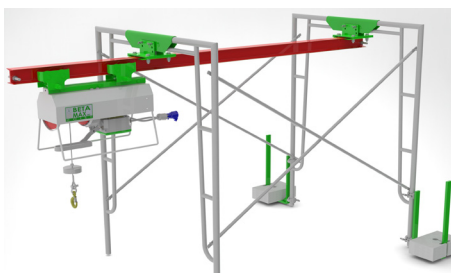

**I-Beam Trolley**



**I-BEAM TROLLEY TOP**

## ACCESSORIES

- Brick Fork • Block Fork • Scaffold Frame Fork • Equipment Basket
- Dumpster Bucket • Spreader Bar • Mud Tub • Double Rope Kit
- Counterweight Clamp Assembly • Remote Control Extension
- Power Cord Extension • Wireless Dual Control Package • Booster Transformer

**Contact Beta Max today for local dealer information,  
to discuss your project, or get a quote.**  
[www.BetamaxHoist.com](http://www.BetamaxHoist.com) (800) 644-6478