

KEY FEATURES & BENEFITS**Cost-Effective and Versatile**

- High Speed Hoist for about 1/3 of the cost of larger hoists
- Dual purpose – can be used as a material hoist or transport platform
- Soft Start / Stop feature to protect payload
- 13 ft. fully extended deck

Much Easier to Install and Operate

- Lower pull-out force and downward forces
- Fold-out platform for easy installation of wall ties
- Self-erecting, build as you go
- Small footprint fits into confined spaces (Approximate area required for hoist placement: 98" x 170")
- Unique open/close system for unloading ramp
- Easy access to electrical panels for maintenance
- Fully galvanized loading and lifting unit for protection from the elements



Applicable Standards: ANSI/ASSP A10.5 and ANSI/SAIA A92.10

INDUSTRIES SERVED

- **Scaffolding**
- **Masonry**
- **Restoration & Renovation**
- **Glazing**

*All Beta Max Hoist Systems meet or exceed ANSI & OSHA specifications. This information is intended to be informative only, and does not constitute a representation or warranty with regard to Beta Max, Inc. or any products or services provided. Prices and information are subject to change. Some or all of the renderings in these materials may vary from the actual hoists.

Rev. 03-2026

Contact BETA MAX today to discuss your project or get a quote.

WWW.BETAMAXHOIST.COM

(800) 644-6478

SPECIFICATIONS

Lift Capacity

4000 lbs

Lift Speed


40 fpm and 80 fpm

Basket Dimensions


59" x 158"

A/C Power



**3 Φ 208v, 85A
(Recommended 100A supply power service to the base of unit)**



Scale: 1:10

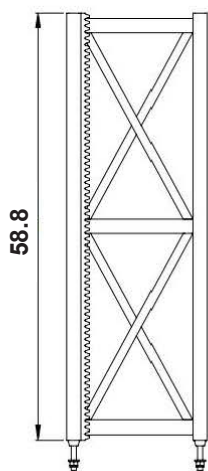

Scale: 1:10

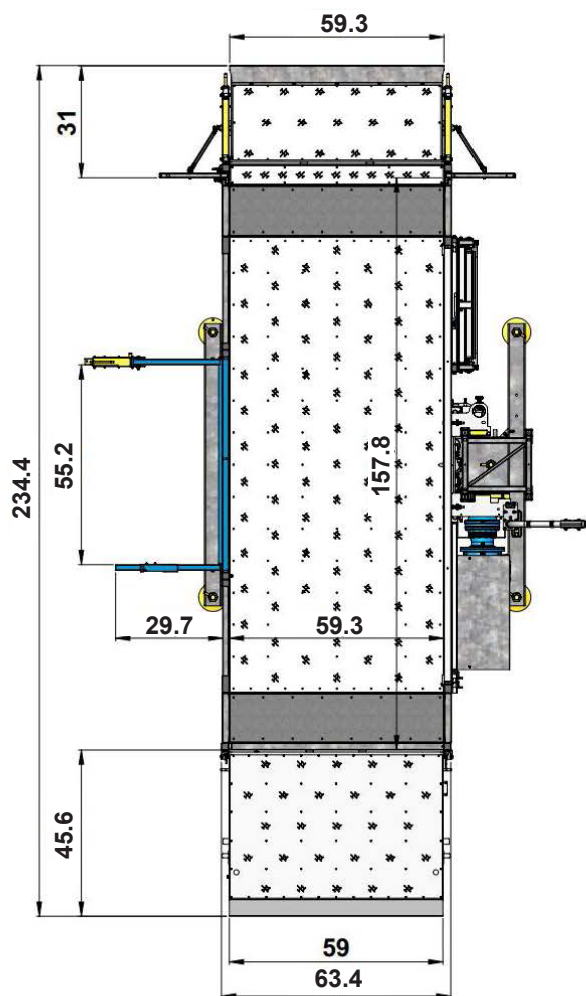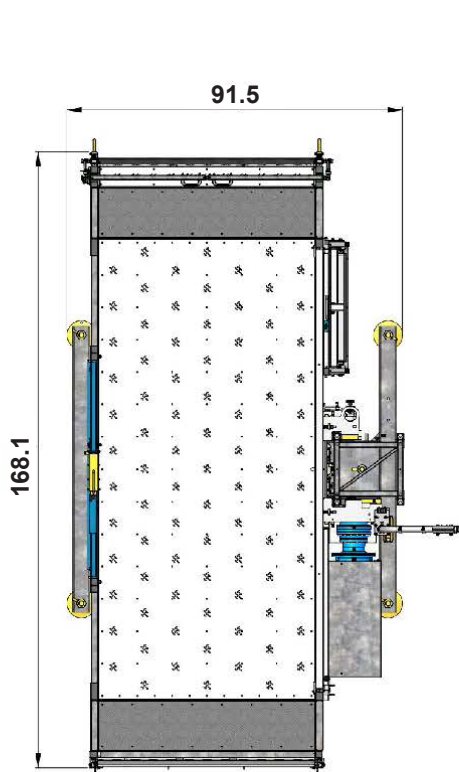

Scale: 1:20

Contact BETA MAX today to discuss your project or get a quote.

WWW.BETAMAXHOIST.COM

(800) 644-6478